
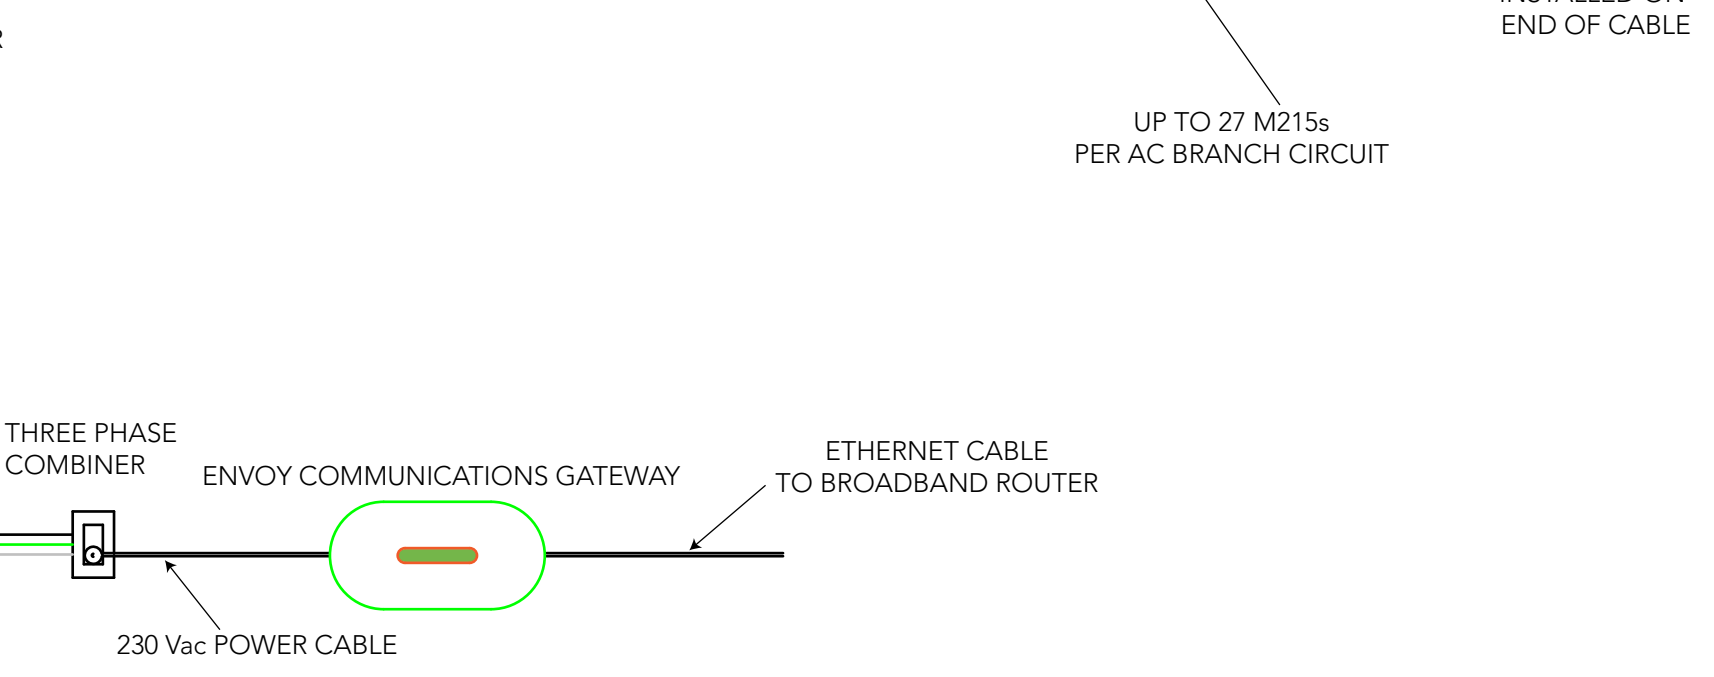
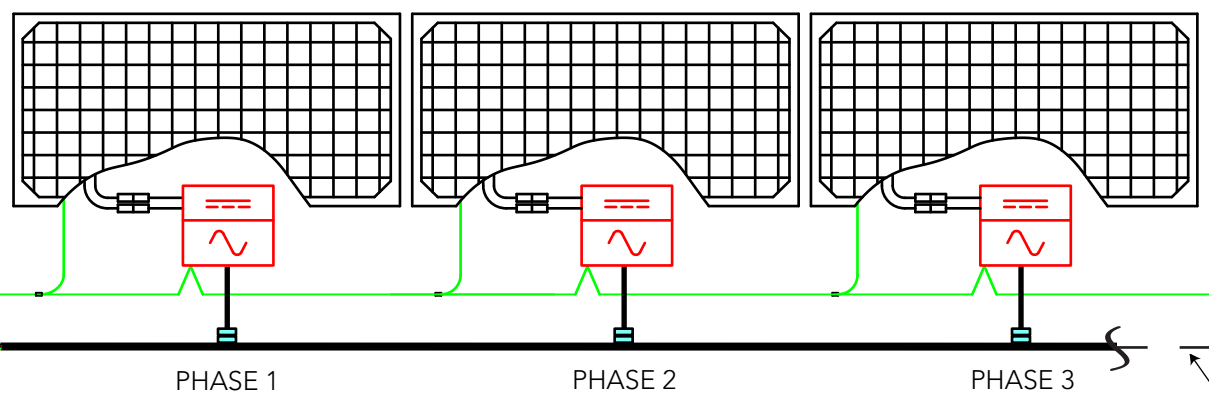


ENPHASE CABLE
 BROWN - L1
 BLACK - L2
 GREY - L3
 BLUE - NEUTRAL
 GREEN/YELLOW - EARTH

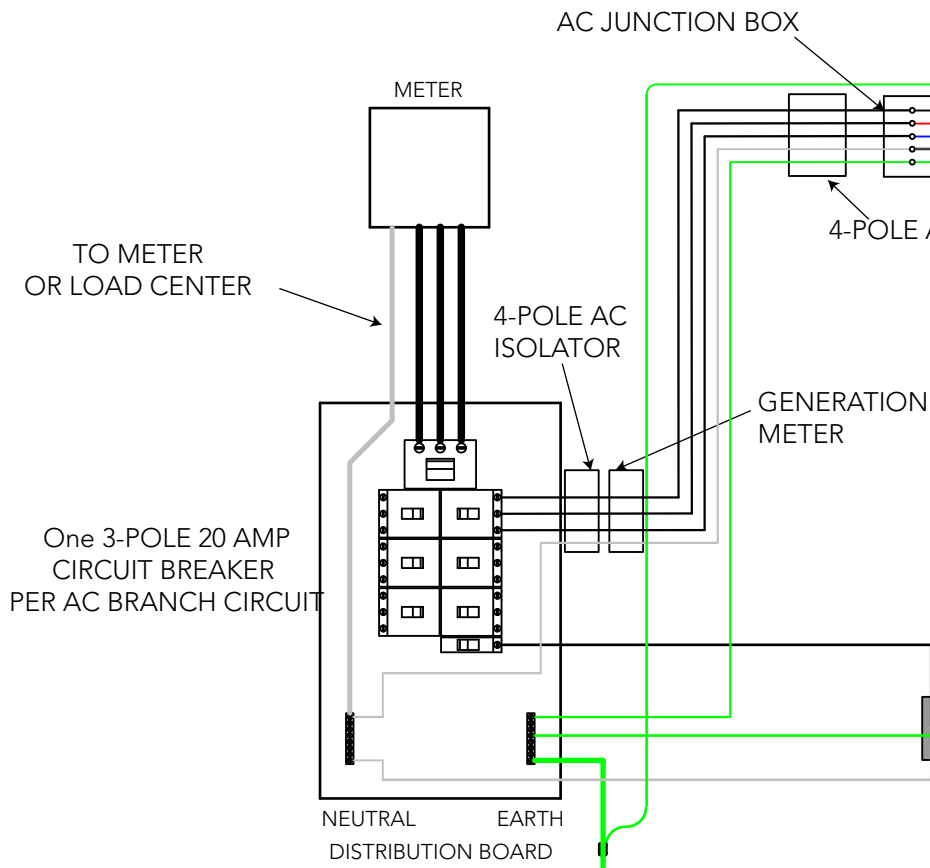

IMPORTANT: Make sure to measure the line-to-line and the line-to-neutral voltage of all service entrance conductors prior to installing any solar equipment. The voltages for the microinverters must be within acceptable ranges: line to line - 360 to 440 Vac; line to neutral - 207 to 253 Vac.

**FIELD WIRING DIAGRAM
 THREE PHASE**