



Academy

SURFACE & PENDANT

Designed to meet the technical lighting requirements of modern interiors from education and healthcare to boardroom and retail environments.

RANGE FEATURES

- Up to 50,000 hours of maintenance free operations
- Low glare, diffused output

Academy	19
Decorative Surface	20
Pendant	20

230v /50hz	CRI >80
---------------	------------

ACADEMY

- Ideal replacement for linear fluorescent
- Designed for surface mounting in office and educational environments
- Steel backplate with polycarbonate diffuser, secured by screwed endcaps
- Uses high quality opal prism diffuser for reduced glare
- Suitable for suspended mounting, see page 14 (LWSK415 ordered separately)



4000K
NEUTRAL
WHITE

WHITE
FINISH

OPAL PRISM

CAT NO.	DRIVER	SIZE	LUMINAIRE LUMENS	WATTAGE	EFFICACY Llm/W	CURRENT
LAC12P22S40	Standard	4ft / 1260mm	2200	22W	100	900mA
LAC12P22E40	Emergency	4ft / 1260mm	2200	22W	100	900mA
LAC12P22D40	Dimmable	4ft / 1260mm	2200	22W	100	900mA
LAC12P22ED40	Emergency Dim	4ft / 1260mm	2200	22W	100	900mA
LAC12P22S40MW	Microwave	4ft / 1260mm	2200	22W	100	900mA
LAC12P40S40	Standard	4ft / 1260mm	4000	39W	103	1050mA
LAC12P40E40	Emergency	4ft / 1260mm	4000	39W	103	1050mA
LAC12P40D40	Dimmable	4ft / 1260mm	4000	39W	103	1050mA
LAC12P40ED40	Emergency Dim	4ft / 1260mm	4000	39W	103	1050mA
LAC12P40S40MW	Microwave	4ft / 1260mm	4000	39W	103	1050mA

CAT NO.	DRIVER	SIZE	LUMINAIRE LUMENS	WATTAGE	EFFICACY Llm/W	CURRENT
LAC15P32S40	Standard	5ft / 1560mm	3200	31W	103	1050mA
LAC15P32E40	Emergency	5ft / 1560mm	3200	31W	103	1050mA
LAC15P32D40	Dimmable	5ft / 1560mm	3200	31W	103	1050mA
LAC15P32ED40	Emergency Dim	5ft / 1560mm	3200	31W	103	1050mA
LAC15P32S40MW	Microwave	5ft / 1560mm	3200	31W	103	1050mA
LAC15P60S40	Standard	5ft / 1560mm	6000	58W	103	1400mA
LAC15P60E40	Emergency	5ft / 1560mm	6000	58W	103	1400mA
LAC15P60D40	Dimmable	5ft / 1560mm	6000	58W	103	1400mA
LAC15P60ED40	Emergency Dim	5ft / 1560mm	6000	58W	103	1400mA
LAC15P60S40MW	Microwave	5ft / 1560mm	6000	58W	103	1400mA

CAT NO.	DRIVER	SIZE	LUMINAIRE LUMENS	WATTAGE	EFFICACY Llm/W	CURRENT
LAC18P45S40	Standard	6ft / 1825mm	4500	46W	98	1400mA
LAC18P45E40	Emergency	6ft / 1825mm	4500	46W	98	1400mA
LAC18P45D40	Dimmable	6ft / 1825mm	4500	46W	98	1400mA
LAC18P45ED40	Emergency Dim	6ft / 1825mm	4500	46W	98	1400mA
LAC18P45S40MW	Microwave	6ft / 1825mm	4500	46W	98	1400mA
LAC18P80S40	Standard	6ft / 1825mm	8000	85W	94	1050mA
LAC18P80E40	Emergency	6ft / 1825mm	8000	85W	94	1050mA
LAC18P80D40	Dimmable	6ft / 1825mm	8000	85W	94	1050mA
LAC18P80ED40	Emergency Dim	6ft / 1825mm	8000	85W	94	1050mA
LAC18P80S40MW	Microwave	6ft / 1825mm	8000	85W	94	1050mA


CLEAR PRISM - T8

- Fitted with LED T8 Tubes
- Integrated driver

4000K
NEUTRAL
WHITE

WHITE
FINISH

CAT NO.	DRIVER	SIZE	LUMINAIRE LUMENS	WATTAGE	EFFICACY Llm/W
LACT12P38S40	Standard	4ft / 1260mm	3800	48W	80
LACT12P38E40	Emergency	4ft / 1260mm	3800	48W	80
LACT15P51S40	Standard	5ft / 1560mm	5120	64W	80
LACT15P51E40	Emergency	5ft / 1560mm	5120	64W	80
LACT18P64S40	Standard	6ft / 1825mm	6400	80W	80
LACT18P64E40	Emergency	6ft / 1825mm	6400	80W	80

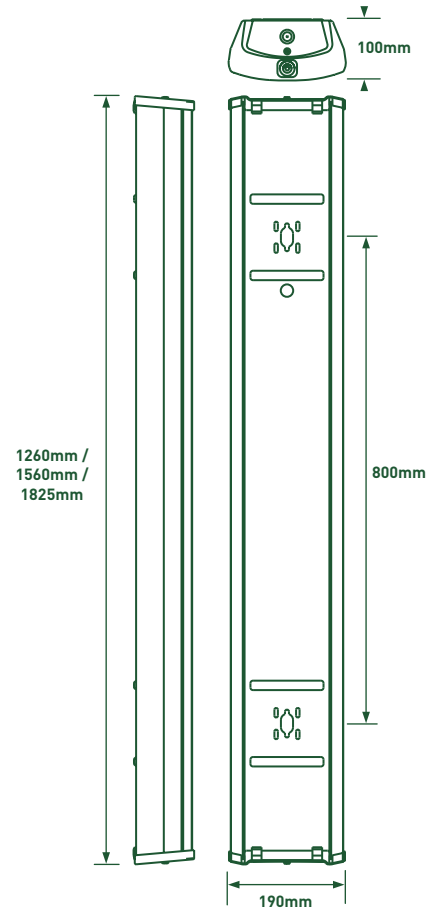




DECORATIVE SURFACE

- Fixed position
- Optical diffuser panel
- Suitable for mounting on wall or ceiling
- Polished finish with black driver housing
- Integral fixed output driver

4000K NEUTRAL WHITE	BEAM ANGLE 108°
----------------------------------	------------------------------




CAT NO.	LUMINAIRE LUMENS	WATTAGE	EFFICACY Llm/W
LKT2017	1400	20W	70

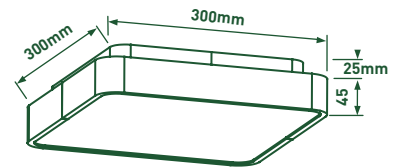

PENDANT

- Anodised aluminium finish
- Suspension cables and transparent feed cable
- Suspension height can be adjusted without tools
- Fixed output constant current driver
- Anti-glare microprismatic surface

4000K NEUTRAL WHITE	BEAM ANGLE 108°
----------------------------------	------------------------------

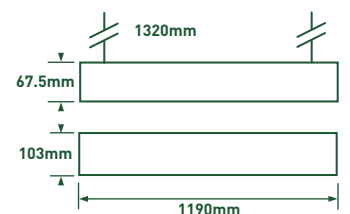


CAT NO.	LUMINAIRE LUMENS	WATTAGE	EFFICACY Llm/W
LKT1013CW	3100	42W	74

PENDANT


- Anodised aluminium finish
- Suspension cables and transparent feed cable
- Suspension height can be adjusted without tools
- Fixed output constant current driver
- Anti-glare microprismatic surface

4000K
NEUTRAL
WHITE


BEAM
ANGLE
103°

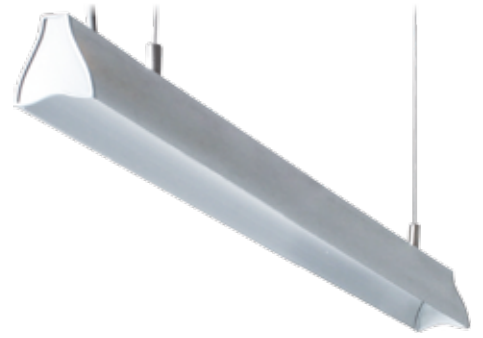

LKT1012ACW

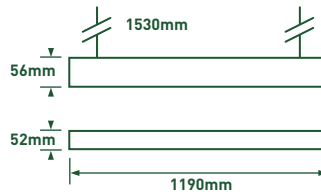

LKT1012BCW

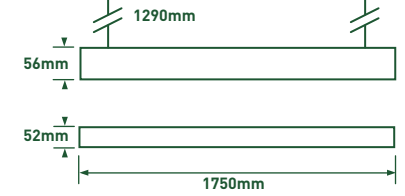

CAT NO.	LUMINAIRE LUMENS	WATTAGE	EFFICACY Lm/W
LKT1012ACW	1400	18.5W	76
LKT1012BCW	2000	30W	67

LKT1012BCW Pendant

