


Application

The Ergo-Pro pump is a particularly developed, economic and time-saving solution for connecting a solid fuel boiler with a buffer tank.


The pump group is apt for circulation pumps with an overall length of 180 mm and flat sealing screw 1½ inches. The boiler is heated up very quickly with the aid of a thermostatic changing valve. To avoid a loss of heat the pump group is equipped with insulation made of EPP foam.



German
manufactured

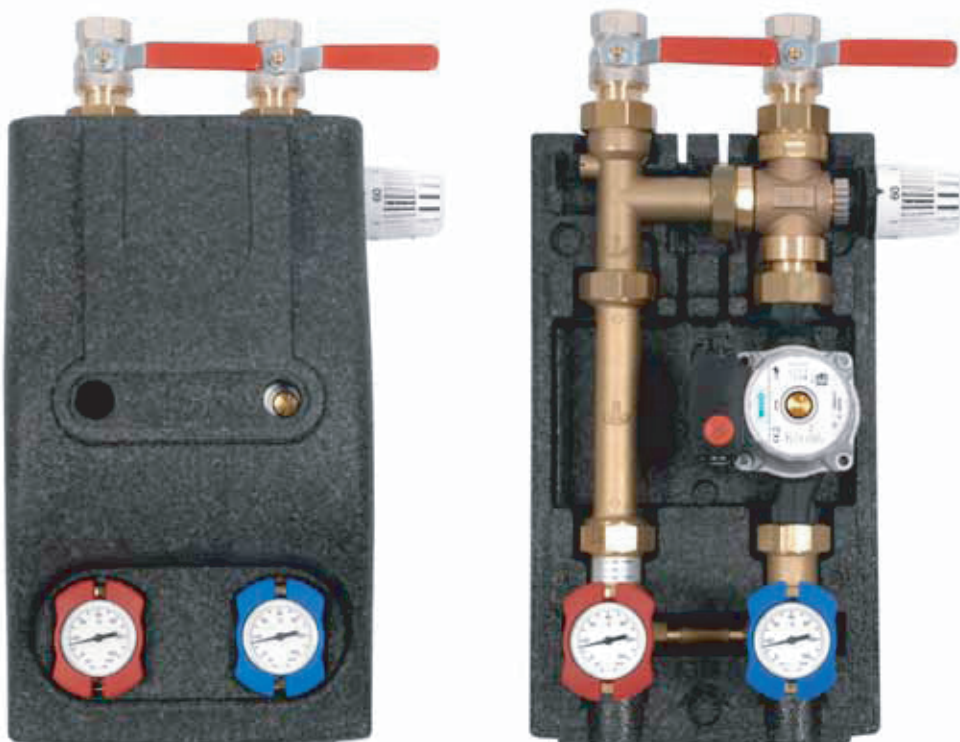

Technical data	
Working pressure:	max. 3 bar
Medium temperature:	max. 115°C
Medium:	Heating water
Dimension/ thermal rating:	DN 25 / max.20 kW with Δt 20 K, v_{max} 1m/s
Sealings:	asbestos-free, flat sealing screwing, nuts 1 ½ inches
Connections	
towards the boiler	Female thread 1 inch
towards the heating circuit	Female thread 1 inch
Materials:	
Housing:	CW 617 N (2.0402)
Connecting pieces	CW 614 N (2.0401)
Isolation	EPP foam
Thermal conductivity:	0,038 W/mK

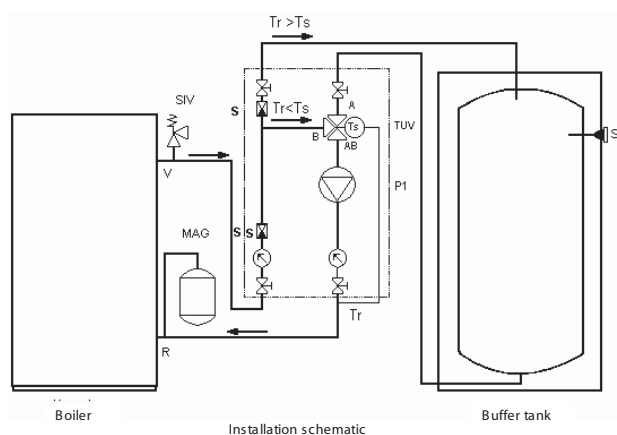

Product Code
600.23.10